SPALLATION NEUTRON SOURCE

## INSTRUMENT

BEAM LINE




# EQ-SANS — EXTENDED Q-RANGE SMALL-ANGLE NEUTRON SCATTERING DIFFRACTOMETER

The EQ-SANS Diffractometer is designed for the study of materials across length scales ranging from 0.1 to 100 nm. The high intensity provided by the EQ-SANS enables both

high-throughput experiments and time-resolved experiments facilitated by the pulsed source of SNS. EQ-SANS enables measurements over a wide Q-range at a single instrument configuration, providing improved throughput.

The high maximum Q of the instrument allows both large-scale and local structure to be studied by the instrument. The versatility of SANS makes EQ-SANS broadly applicable to a wide range of materials from science and industry.

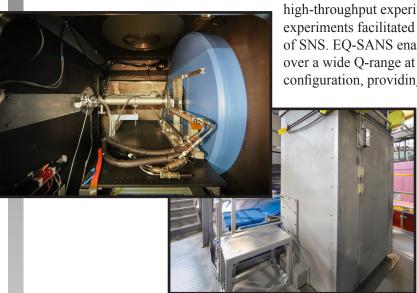

### <u>APPLICATIONS</u>

Life science

- Solution structures of proteins, DNA, and other biological molecules and molecular complexes
- Protein-protein and protein-ligand interactions, kinase regulation
- Protein-membrane interaction
- Materials for drug delivery

Polymer and colloidal systems

- Block copolymers and dendrimers
- Micelles and emulsions
- Polyelectrolytes and ion distribution at solid-liquid interfaces

#### Materials science

- Simultaneous study of domain and crystalline structures
- Crystallization and precipitation
- Nanoparticles

Earth and environmental sciences

- Pore structure in soils
- Structure of geologic materials

#### FOR MORE INFORMATION, CONTACT

Instrument Scientist: Changwoo Do, doc1@ornl.gov, 865.576.6981 Instrument Scientist: William Heller, hellerwt@ornl.gov, 865.241.0093 Instrument Scientist: Gergely Nagy, nagyg@ornl.gov, 865.341.0482

neutrons.ornl.gov/eqsans

#### SPECIFICATIONS

Source- to-sample distance	14 m
Bandwidth	3–4.3 Å
Moderator	Coupled supercritical hydrogen
Integrated flux on sample	Up to ~10 <sup>7</sup> n/cm <sup>2</sup> /s
Q range	0.002 Å <sup>-1</sup> < Q < 5 Å <sup>-1</sup>

Low-Angle Detector	
Sample- to-detector distance	1.3–9 m
Detector size	1 x 1 m
Detector resolution	5.5 x 4.3 mm

Status: Available to users

